

sollos[®]

LANDSCAPE LIGHTING
A Halco Lighting Technologies Company



THE ART OF OUTDOOR ILLUMINATION

The Art of Outdoor Illumination

Sollos Landscape Lighting offers a complete line of fixtures and finishes that enhance gardens, landscapes and outdoor settings. Surroundings are enriched by the subtle curves and organic feel of natural metal and architectural aluminum finishes. Dynamic fixture functionality provides safety, security and quality illumination. Superior thermal management allows Sollos fixtures to operate both halogen and LED lamp technologies. Sollos fixtures powered by energy efficient Halco ProLED lamps provide consistent, reliable light output. Sollos Landscape Lighting combines aesthetic styling and ProLED power for today's landscapes.

Sollos & Halco ProLED Advantage

When powered by ProLED lamps, Sollos fixtures provide sustainable, high performance and quality LED illumination.

Powered by ProLED

ProLED lamps are constructed with LED chips, integrated drivers and transformers. ProLED lamps utilize a special heat sink to safely drive the components and achieve a long lifespan. The input voltage range of ProLED lamps eliminate voltage drop, which is a common hurdle with traditional lamp technologies. ProLED lamps perform to specification at every input voltage within their voltage range. For applications that normally require that the lamp is protected from the elements, Halco offers ingress protection (IP) rated ProLED lamps.

Rigorous adherence to design and manufacturing specifications ensures consistent lamp-to-lamp color, light output and beam spreads. ProLED lamps are available in a variety of color temperatures and color-changing red-green-blue (RGB).

LM-79 and IES files are available for all ProLED lamps upon request.

Fixture Warranty:

Aluminum Fixtures backed by a 5 year warranty. Antique Brass, Composite, Copper, and Stainless Steel fixtures are backed by a Lifetime Limited Warranty, Commercial Transformers by a Lifetime Limited Warranty, Integrated Transformers for 2 Years and Smart Transformers 5 years. For more information, please refer to the warranty statement on www.solloslighting.com.

Strongest Lamp Warranty



When installed in a Sollos fixture in recommended conditions and packaging warnings are followed, ProLED MR16 and IP65-rated JC lamps are backed by a 20-year limited warranty, the strongest lamp warranty in the industry. When installed in other fixtures, these lamps are backed by a 5-year Limited Warranty. ProLED 912 lamps and non-IP65-rated JC lamps are backed by a 2-year Limited Warranty.

Think Lumens!

Efficient lighting technologies such as LED lamps produce comparable light output while consuming considerably less energy than traditional light sources. When evaluating replacement lamps, refer to lamps' light output, which is measured in lumens, rather than wattage. Lamps with relatively equivalent lumens and CBCP will provide similar illumination. So think lumens for light output and use lamp wattage to determine energy savings.

Table of Contents

	Page 5	4	Products Ordering Guide
	Page 6	5	Up & Accent Lights
	Page 7	6	Path Lights
	Page 7	7	Pendant Light
	Page 7	7	Ledge Lights
	Page 7	7	In-Ground & Well Lights
	Page 7	7	Step Lights
	Page 8	7	Deck Lights
	Page 8	8	Commercial, Integrated, Smart Transformers
	Page 8	8	MR16
		8	Accessories
		9	Lamps
		10	Lamp Guide
		11	Lamp Guide - continued

Contemporary, Straight & Modern Bullet

Mix and Match Bullet Light Ordering

Sollos Bullet Lights are supplied with an 8" ground stake. To order with lamp, please provide the lamp part number (indicated below) with the fixture order code from the following pages.

1 Select the Fixture:



Contemporary Bullet



Straight Bullet



Modern Bullet

2 Select the Finish:



Antique Brass



Stainless Steel



Copper



Textured Bronze



Textured Black

3 Select the Light Output Equivalent:



MR16FL4/827/LED



MR16BAB/827/LED



MR16NFL10/827/LED



MR16WFL10/827/LED

Modern, Traditional, Straight & Dome Hats

Mix and Match Path Light Ordering

Sollos Path Light kits include a hat, stem, 8" ground stake, and lamp. All Sollos Path Lights are supplied with a Halco JC20 halogen lamp unless another lamp model is specified.

1 Select the Fixture:



Modern Hat



Traditional Hat



Straight Hat



Dome Hat



Mushroom
(Stem Included)

2 Select the Stem Height



3 Select the Finish:



Antique Brass



Stainless Steel



Copper



Textured Bronze



Textured Black

4 Select the Light Output Equivalent:



JC1/830/OMNI/IP65/LED



JC2/830/OMNI/IP65/LED



JC3/830/OMNI/IP65/LED



JC10/1WW/LED



JC20/2WW/LED



JC2/827/LED2



JC25/830/LED2

Example: To order an Antique Brass 5.5" Traditional Hat with 15" Stem and Halco ProLED JC20/2WW/LED Lamp, the order code would be **PTH055-AB-15-JC20/2WW/LED**. See Page 9 for our line of transformers. See Page 11 for our line of lamps.

Up & Accent Lights

Contemporary Bullet



BCB065

Housing	Cast Brass or Architectural Aluminum
Lens	Clear Tempered Glass
Stem/Knuckle	Cast Brass or Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	BCB065-AB
Textured Black	BCB065-TB
Textured Bronze	BCB065-TZ

Modern Bullet



BMB062

Housing	Architectural Aluminum
Lens	Clear Tempered Glass
Stem/Knuckle	Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Textured Black	BMB062-TB
Textured Bronze	BMB062-TZ

Straight Bullet



BSB067

Housing	Cast Brass, Natural Copper or Stainless Steel
Lens	Clear Tempered Glass
Stem/Knuckle	Cast Brass
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	BSB067-AB
Textured Black	BSB067-CU
Textured Bronze	BSB067-SS

Straight Bullet



BSB062

Housing	Cast Brass or Architectural Aluminum
Lens	Clear Tempered Glass
Stem/Knuckle	Cast Brass or Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Textured Black	BSB062-TB
Textured Bronze	BSB062-TZ

Straight Bullet



BSB060

Housing	Architectural Aluminum
Lens	Clear Tempered Glass
Stem/Knuckle	Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Textured Black	BSB060-TB
Textured Bronze	BSB060-TZ

Straight Bullet



BSB054

Housing	Cast Brass or Natural Copper
Lens	Clear Tempered Glass
Stem/Knuckle	Cast Brass
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR11 (35W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	BSB054-AB
Copper	BSB054-CU

PAR 36 Accent Light



BSB036

Housing	Antique Brass
Lens	Clear Tempered Glass
Stem/Knuckle	Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	G5.3 Bi-Pin
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	BSB036-AB

Flood



Lamp shown not included.

FRF058

Housing	Cast Brass or Architectural Aluminum
Lens	Clear Tempered Glass
Stem/Knuckle	Cast Brass or Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	T4 Bi-Pin (50W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	FRF058-AB
Textured Black	FRF058-TB
Textured Bronze	FRF058-TZ

Flood



FRF057

Housing	Cast Brass or Architectural Aluminum
Lens	Includes Both Clear and Frosted Glass
Stem/Knuckle	Cast Brass or Architectural Aluminum
Wiring	3 ft. 18-2 Lead Wire
Lamp	T4 Bi-Pin
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	FRF057-AB

Flood



DLBCB075

Housing	Antique Brass
Lens	Clear Tempered Glass
Stem/Knuckle	Antique Brass
Wiring	25 ft. 18-2 Lead Wire
Lamp	T4 Bi-Pin
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	DL-BCB075-AB (995503)

Flood



DLBCB077

Housing	Antique Brass
Lens	Clear Tempered Glass
Stem/Knuckle	Antique Brass
Wiring	25 ft. 18-2 Lead Wire
Lamp	G5.3 Bi-Pin
Mounting Accessory	8" Ground Stake Included
Order Codes	
Antique Brass	DL-BCB077-AB (995504)

Path Lights




Contemporary Bullet

PMH

Housing	Antique Brass or Natural Copper	
Lens	Clear Polycarbonate with Dual Silicone Gaskets	
Collar	Brass	
Stem Options	12", 15" and 18"	
Wiring	3 ft. 18-2 Lead Wire	
Lamp	T3 Bi-Pin (20W Max)	
Mounting Accessory	8" Ground Stake Included	
Order Codes	5" Diameter	7" Diameter
12" Stem		
Antique Brass	PMH050-AB-12	PMH070-AB-12
Copper	PMH050-CU-12	PMH070-CU-12
15" Stem		
Antique Brass	PMH050-AB-15	PMH070-AB-15
Copper	PMH050-CU-15	PMH070-CU-15
18" Stem		
Antique Brass	PMH050-AB-18	PMH070-AB-18
Copper	PMH050-CU-18	PMH070-CU-18

PMH070-AB-18

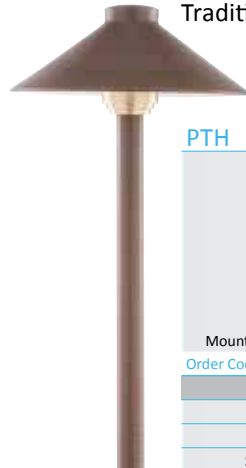

Traditional Hat

PTH

Housing	Natural Copper, Antique Brass or Stainless Steel		
Lens	Clear Polycarbonate with Dual Silicone Gaskets		
Collar	Brass		
Stem Options	12", 15" and 18"		
Wiring	3 ft. 18-2 Lead Wire		
Lamp	T3 Bi-Pin (20W Max)		
Mounting Accessory	8" Ground Stake Included		
Order Codes	4" Diameter	5.5" Diameter	7.5" Diameter
12" Stem			
Antique Brass	PTH040-AB-12	PTH055-AB-12	PTH075-AB-12
Copper	PTH040-CU-12		
Stainless Steel		PTH055-SS-12	
15" Stem			
Antique Brass	PTH040-AB-15	PTH055-AB-15	PTH075-AB-15
Copper	PTH040-CU-15	PTH055-CU-15	PTH075-CU-15
Stainless Steel		PTH055-SS-15	PTH075-SS-15
18" Stem			
Antique Brass		PTH055-AB-18	PTH075-AB-18
Copper		PTH055-CU-18	PTH075-CU-18
Stainless Steel		PTH055-SS-18	PTH075-SS-18

PTH075-AB-15



Dome Hat

PDO

Housing	Architectural Aluminum
Lens	Clear Tempered Glass
Collar	Architectural Aluminum
Stem Options	12", 15" and 18"
Wiring	3 ft. 18-2 Lead Wire
Lamp	T3 Bi-Pin (20W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
12" Stem	
Textured Black	PDO083-TB-12
Textured Bronze	PDO083-TZ-12
15" Stem	
Textured Black	PDO083-TB-15
Textured Bronze	PDO083-TZ-15
18" Stem	
Textured Black	PDO083-TB-18
Textured Bronze	PDO083-TZ-18

PDO083-TZ-15



Mushroom Hat

PMU

Housing	Architectural Aluminum
Lens	Clear Tempered Glass with Dual Silicone Gaskets
Stem Options	15" Included
Wiring	3 ft. 18-2 Lead Wire
Lamp	T3 Bi-Pin (20W Max)
Mounting Accessory	8" Ground Stake Included
Order Codes	
15" Stem	
Textured Black	PMU050-TB-15
Textured Bronze	PMU050-TZ-15

PMU050-TB-15



Straight Hat

PSH

Housing	Architectural Aluminum			
Lens	Clear Tempered Glass			
Collar	Architectural Aluminum			
Stem Options	12", 15" and 18"			
Wiring	3 ft. 18-2 Lead Wire			
Lamp	T3 Bi-Pin (20W Max)			
Mounting Accessory	8" Ground Stake Included			
Order Codes	4" Diameter	5.5" Diameter	7.5" Diameter	9" Diameter
12" Stem				
Textured Bronze	PSH040-TZ-12	PSH055-TZ-12	PSH075-TZ-12	PSH090-TZ-12
Textured Black	PSH040-TB-12	PSH055-TB-12	PSH075-TB-12	PSH090-TB-12
15" Stem				
Textured Bronze	PSH040-TZ-15	PSH055-TZ-15	PSH075-TZ-15	PSH090-TZ-15
Textured Black	PSH040-TB-15	PSH055-TB-15	PSH075-TB-15	PSH090-TB-15
18" Stem				
Textured Bronze		PSH055-TZ-18	PSH075-TZ-18	PSH090-TZ-18
Textured Black		PSH055-TB-18	PSH075-TB-18	PSH090-TB-18

PSH040-TB-15

Underwater Light



UWL-R33-AB

UWL-R33-AB

Housing	Cast brass body and cap with large black thumb screws
Lens	High impact clear tempered flat glass
Cover	Brass
Aiming	Surface mount aiming bracket
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Order Codes	
Antique Brass	UWL-R33-AB

Rock Guard



IGG049-SS

IGG049

Housing	Single-Piece Compression Molded Polyester Composite
Lens	Shock and Heat-Resistant Clear Tempered Glass
Cover	Brass, Composite or Stainless Steel
Aiming	Adjustable Lamp Bracket Provides +/- 15° of Tilt
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Order Codes	
Antique Brass	IGG049-AB
Composite Black	IGG049-CB
Stainless Steel	IGG049-SS

Trim Ring



IGT049-AB

IGT049

Housing	Single-Piece Compression Molded Polyester Composite
Lens	Shock and Heat-Resistant Clear Tempered Glass
Cover	Composite or Stainless Steel
Aiming	Adjustable Lamp Bracket Provides +/- 15° of Tilt
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (50W Max)
Order Codes	
Antique Brass	IGT049-AB
Composite Black	IGT049-CB
Stainless Steel	IGT049-SS

Well Light



WPO055-CB

WPO055

Housing	Composite Black ABS
Lamp Holder	Adjustable Height and Angle
Aiming	360° Lamp Rotation
Wiring	3 ft. 18-2 Lead Wire with Slip-on Connectors
Lamp	PAR36 (50W Max)
Order Codes	
Well Light	WPO055-CB
Replacement Bracket	WPO055-BRACKET

Deck Lights

Post Lights



DPL033-AB

DPL033

Housing	Die Cast Aluminum or Brass
Lens	Shock and Heat-Resistant Frosted Tempered Glass
Mounting	Surface Mounting Plate
Wiring	3 ft. 18-2 Lead Wire
Lamp	T3 Bi-Pin (10W Max Brass; 20W Max Aluminum)
Order Codes	
Antique Brass	DPL033-AB
Textured Black	DPL033-TB
Textured Bronze	DPL033-TZ

Under-Step Lights



DUS120-CU

DUS060-CU

DUS060/DUS120

Housing	Die Cast Aluminum
Cover	Antique Brass, Natural Copper or Stainless Steel
Lens	Shock and Heat-Resistant Frosted Tempered Glass
Mounting	Optional Stainless Steel Mounting Plate for Hard-scape Installations
Wiring	3 ft. 18-2 Lead Wire
Lamp	912 Wedge (20W Max) - DUS120 Operates Two Lamps
Order Codes	
Antique Brass	DUS060-AB
Copper	DUS060-CU
Stainless Steel	DUS060-SS
Mounting Plate	MP06
	MP12

Step Lights

Louver Faceplate



SBL048-TZ

SBL048

Housing	Die Cast Aluminum with Adjustable Mounting Brackets
Faceplate	Architectural Grade or Aluminum
Faceplate Mounting	Adjustable Nylon Mounts Correct Undesired Tilt
Lens	Shock and Heat-Resistant Frosted Tempered Glass
Aiming	Adjustable Socket for Proper Lamp Centering
Wiring	3 ft. 18-2 Lead Wire
Lamp	T3 Bi-Pin (20W Max)
Order Codes	
Textured Black	SBL048-TB
Textured Bronze	SBL048-TZ

Trim Faceplate



SBT048-TZ

SBT048

Housing	Die Cast Aluminum with Adjustable Mounting Brackets
Faceplate	Copper, Stainless Steel, or Architectural Grade Aluminum
Faceplate Mounting	Adjustable Nylon Mounts Correct Undesired Tilt
Lens	Shock and Heat-Resistant Frosted Tempered Glass
Aiming	Adjustable Socket for Proper Lamp Centering
Wiring	3 ft. 18/2 Lead Wire
Lamp	T3 Bi-Pin (20W Max)
Order Codes	
Copper	SBT048-CU
Textured Black	SBT048-TB
Textured Bronze	SBT048-TZ

Ledge Lights



LLA055/827/TB



LLA055/827

Replaceable Light Module

LLA055

Housing	Architectural Aluminum
Lens	Shock and Heat-Resistant Frosted Tempered Glass
Wiring	10 ft. (3 m) 18-2 lead-wire
Lamp	0.6 Watt, 2700K LED
Order Codes	
Antique Brass	LLA055/827/AB
Textured Black	LLA055/827/TB
Textured Bronze	LLA055/827/TZ
Light Module	LLA055/827

Pendant Light



HLS043-CU

HLS043

Housing	Cast Brass or Natural Copper
Lens	Clear Tempered Glass
Base	Cast Brass
Wiring	3 ft. 18-2 Lead Wire
Lamp	MR16 (35W Max)
Mounting Accessory	6 ft. Stainless Steel Hanger Included
Order Codes	
Antique Brass	HLS043-AB

Transformers

Commercial



TR15SS-600

TR15SS-300

Max VA	Order Codes
150VA	TR15SS-150
300VA	TR15SS-300
600VA	TR15SS-600
900VA	TR15SS-900

Integrated



TR12PC-INT-100

TR12SS-INT-120
TR12SS-INT-200

TR15SS-INT-300

Max VA	Voltage Taps	Order Codes
100VA	12V	TR12PC-INT-100
120VA	12V	TR12SS-INT-120
200VA	12V	TR12SS-INT-200
300VA	12V, 13V, 14V, 15V	TR15SS-INT-300

Smart



TR14ST-150, TR14ST-300

Max VA	Voltage Taps	Order Codes
120VA	14V x (2)	TR14ST-150
120VA		TR14ST-300

FREE Sollos® app available from the app store for Apple® or Google Play Store™ for Android™



MR 16

MR 16 RGB-W



See Page 10 for specifications

MR16 Black



See Page 10 for specifications

MR16 Black 35 Watt



See Page 10 for specifications

Download the FREE Sollos ColorSplash app and bring the power of landscape lighting control to your fingertips! Using the app, you can connect lighting, create zones, turn on/off, change or create programs...and so much more!



Accessories



TMA
Analog Timer
24-hour clock
3 on/off settings per day



TMDA
Digital Astronomic Timer
Build-in daylight saving time function
Auto adjusts to sunrise/sunset for dusk/dawn settings



DMT027
Deck Mount
2.7"
Antique Brass (AB)
Textured Black (TB)
Textured Bronze (TZ)



RSR12, RSR18
Risers
12" and 18"
Antique Brass (AB)
Textured Black (TB)
Textured Bronze (TZ)



GS08-NS
Ground Stake
8" Black ABS
No Slot cutout for wires



GS08
Ground Stake
8" Black ABS



PCS
Photocell
6" Lead


LED Lamps



912



JC10 BA15s



JC10 G4



JC20 G4



JC20 BA15s



JC35 GY6.35



JC50 GY6 35



JC2S



JC2



JC10/20 BA15s



JC20 BA15s



912 Wedge



3155 Wedge



81996



81998



81999



MR16BAB



MR11FTD



G25



ST19



B10



A19



S14



S14AM



T10



PAR36WFL



9051

Lamp Guide

Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life	Wattage Equivalent
Traditional JC Series											
JC10											
1W	Wedge	80791	912/1WW/LED2	Omnidirectional		10-18	3000K	82	75	20,000	10
1.5 Watt	BA15s	80692	JC10/1WW/BA15S/LED	Omnidirectional		10-24	3000K	82	150	30,000	10
1.5 Watt	G4	80693	JC10/1WW/LED	Omnidirectional		10-24	3000K	82	150	30,000	10
JC20											
2.4 Watt	BA15s	80691	JC20/2WW/BA15S/LED	Omnidirectional		10-24	3000K	82	250	30,000	20
2.4 Watt	G4	80833	JC2/827/LED	Omnidirectional		10-24	2700K	82	240	30,000	20
2.4 Watt	G4	80690	JC20/2WW/LED	Omnidirectional		10-24	3000K	82	250	30,000	20
2.4 Watt	G4	80815	JC20/2NW/LED	Omnidirectional		10-24	5000K	82	260	30,000	20
JC35											
4.5 Watt	GY6.35	80830	JC35/4WW/LED	Omnidirectional		10-18	3000K	82	450	30,000	35
JC50											
5.5 Watt	GY6.35	81997	JC50/5WW/LED	Omnidirectional		10-18	3000K	82	550	30,000	50
JC3											
3.3 Watt	G4	81078	JC3VWFL/827/LED	100° Very Wide Flood		12	2700K	82	200	25,000	20
2.5 Watt	G4	81996 ●	JC3/830/OMNI/IP65/LED	Omnidirectional		10-15	-	80	300	15,000	20
IP Rated JC Series											
JC1											
1.2 Watt	G4	81998	JC1/830/OMNI/IP65/LED	IP65 Rated		10-15	3000K	82	110	15,000	10
JC2S											
1.4 Watt	G4	81091	JC2S/827/LED2	IP65 Rated		10-15	2700K	82	140	40,000	20
1.4 Watt	G4	81092	JC2S/830/LED2	IP65 Rated		10-15	3000K	82	150	40,000	20
JC2											
1.6 Watt	G4	81999	JC2/830/OMNI/IP65/LED	IP65 Rated		10-15	3000K	82	180	15,000	20
2.3 Watt	G4	81109	JC2/827/LED2	Omnidirectional, IP65 Rated		10-15	2700K	82	250	40,000	20
2.3 Watt	G4	81108	JC20/2WW/LED2	Omnidirectional, IP65 Rated		10-15	3000K	82	250	40,000	20
JC10											
1.5 Watt	BA15s	80810	JC10/1WW/BA15S/LED2	IP65 Rated		10-18	3000K	82	100	40,000	10
JC20											
2.3 Watt	BA15s	81100	JC20/2WW/BA15S/LED2	IP65 Rated		10-15	3000K	82	250	40,000	20
1.2 Watt	Wedge	81102	912/1WW/LED2	IP65 Rated		10-15	3000K	82	120	40,000	10
2.3 Watt	Wedge	81101	3155/2WW/LED2	IP65 Rated		10-15	3000K	82	250	40,000	20
2.5 Watt	Wedge	80777	3155/2WW/LED	IP65 Rated		10-18	3000K	82	140	40,000	20
MR16											
2.5 Watt	GU5.3	81055	MR16NFL10/827/LED	Narrow Flood w♦♦		10-18	2700K	82	200	40,000	10
2.5 Watt	GU5.3	81079	MR16NFL10/830/LED	Narrow Flood w♦♦		10-18	3000K	82	210	40,000	10
2.5 Watt	GU5.3	81056	MR16FL10/827/LED	Flood w♦♦		10-18	2700K	82	200	40,000	10
2.5 Watt	GU5.3	81077	MR16FL10/830/LED	Flood w♦♦		10-18	3000K	82	210	40,000	10
2.5 Watt	GU5.3	81058	MR16FL10/850/LED	Flood w♦♦		10-18	5000K	82	230	40,000	10
2.5 Watt	GU5.3	81057	MR16WFL10/827/LED	Wide Flood w♦♦		10-18	2700K	82	200	40,000	10
2.5 Watt	GU5.3	81080	MR16WFL10/830/LED	Wide Flood w♦♦		10-18	3000K	82	210	40,000	10
4 Watt	GU5.3	81059	MR16BBF/827/LED	Narrow Flood w♦♦		10-18	2700K	82	300	40,000	20
4 Watt	GU5.3	81081	MR16BBF/830/LED	Narrow Flood wv		10-18	3000K	82	310	40,000	20
4 Watt	GU5.3	81060	MR16BAB/827/LED	Flood w♦♦		10-18	2700K	82	300	40,000	20
4 Watt	GU5.3	81062	MR16BAB/830/LED	Flood w♦♦		10-18	3000K	82	310	40,000	20
4 Watt	GU5.3	81063	MR16BAB/850/LED	Flood w♦♦		10-18	5000K	82	340	40,000	20
4 Watt	GU5.3	81061	MR16WFL20/827/LED	Wide Flood w♦♦		10-18	2700K	82	300	40,000	20
4 Watt	GU5.3	81082	MR16WFL20/830/LED	Wide Flood w♦♦		10-18	3000K	82	310	40,000	20
4.5 Watt	GU5.3	81064	MR16FRA/827/LED	Narrow Flood w♦♦		10-15	2700K	82	380	40,000	35
4.5 Watt	GU5.3	81083	MR16FRA/830/LED	Narrow Flood w♦♦		10-15	3000K	82	390	40,000	35
4.5 Watt	GU5.3	81065	MR16FMW/827/LED	Flood w♦♦		10-15	2700K	82	380	40,000	35
4.5 Watt	GU5.3	81067	MR16FMW/830/LED	Flood w♦♦		10-15	3000K	82	390	40,000	35
4.5 Watt	GU5.3	81068	MR16FMW/850/LED	Flood w♦♦		10-15	5000K	82	430	40,000	35
4.5 Watt	GU5.3	81066	MR16WFL35/827/LED	Wide Flood w♦♦		10-15	2700K	82	380	40,000	35
4.5 Watt	GU5.3	81084	MR16WFL35/830/LED	Wide Flood w♦♦		10-15	3000K	82	390	40,000	35
8 Watt	GU5.3	81069	MR16EXZ/827/LED	Narrow Flood w♦♦		10-18	2700K	82	590	40,000	50
8 Watt	GU5.3	81085	MR16EXZ/830/LED	Narrow Flood w♦♦		10-18	3000K	82	600	40,000	50
8 Watt	GU5.3	81070	MR16EXN/827/LED	Flood w♦♦		10-18	2700K	82	590	40,000	50
8 Watt	GU5.3	81072	MR16EXN/830/LED	Flood w♦♦		10-18	3000K	82	600	40,000	50
8 Watt	GU5.3	81073	MR16EXN/850/LED	Flood w♦♦		10-18	5000K	82	660	40,000	50
8 Watt	GU5.3	81071	MR16FNV/827/LED	Wide Flood w♦♦		10-18	2700K	82	590	40,000	50
8 Watt	GU5.3	81086	MR16FNV/830/LED	Wide Flood w♦♦		10-18	3000K	82	600	40,000	50

● May not be compatible with all dimming systems. Use on incompatible systems may shorten lamp life. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.
 ♦ Acceptable for use in sealed metal landscape fixtures when protected from the elements.
 ● New Product

Lamp Guide

Watt	Base	Product #	Product Code	Description	Dimmable	Volts	Color Temp.	CRI	Lumens	Useful Life	Wattage Equivalent
MR16											
8 Watt	GU5.3	81069	MR16EXZ/827/LED	Narrow Flood w♦♦		10-18	2700K	82	590	40,000	50
8 Watt	GU5.3	81085	MR16EXZ/830/LED	Narrow Flood w♦♦		10-18	3000K	82	600	40,000	50
8 Watt	GU5.3	81070	MR16EXN/827/LED	Flood w♦♦		10-18	2700K	82	590	40,000	50
8 Watt	GU5.3	81072	MR16EXN/830/LED	Flood w♦♦		10-18	3000K	82	600	40,000	50
8 Watt	GU5.3	81073	MR16EXN/850/LED	Flood w♦♦		10-18	5000K	82	660	40,000	50
8 Watt	GU5.3	81071	MR16FNV/827/LED	Wide Flood w♦♦		10-18	2700K	82	590	40,000	50
8 Watt	GU5.3	81086	MR16FNV/830/LED	Wide Flood w♦♦		10-18	3000K	82	600	40,000	50
4 Watt	GU5.3	81103	MR16NFL4/827/LED	20°D	Yes	10-15	2700K	82	250	30,000	20
4 Watt	GU5.3	81098	MR16FL4/827/LED	40°D	Yes	10-15	2700K	82	250	30,000	20
4 Watt	GU5.3	81099	MR16WFL4/827/LED	40°D	Yes	10-15	2700K	82	250	30,000	20
4.5 Watt	GU5.3	82094	MR16NFL4.5/827/LED	Narrow Flood w♦♦	Yes	10-15	2700K	82	390	30,000	35
4.5 Watt	GU5.3	82095	MR16FL4.5/827/LED	Narrow Flood w♦♦	Yes	10-15	2700K	82	390	30,000	35
4.5 Watt	GU5.3	82096	MR16WFL4.5/827/LED	Narrow Flood w♦♦	Yes	10-15	2700K	82	390	30,000	35
6 Watt	GU5.3	82099	MR16FL6/RGB-W/LED	40°D	Yes	10-15	RGB-Warm White	80	400	30,000	35
MR11											
3 Watt	GU4	81093	MR11FTD/827/LED	Flood w♦♦		10-18	2700K	82	230	40,000	20
3 Watt	GU4	81095	MR11FTD/850/LED	Flood w♦♦		10-18	2700K	82	250	40,000	20
3 Watt	GU4	81096	MR11FTDC/827/LED	Narrow Flood w♦♦		10-18	2700K	82	230	40,000	20
G25											
4.5 Watt	E26	81131	G25CL4ANT/827/LED	Clear Filament	Yes	120	2700K	82	450	15,000	40
ST19											
5 Watt	E26	81132	ST19AMB5ANT/722/LED	Clear Filament	Yes	120	2200K	75	300	15,000	40
T10											
5 Watt	E26	81133	T10AMB5ANT/722/LED	Amber Filament	Yes	120	2200K	75	450	15,000	40
B10											
4 Watt	E26	81134	B10CL4ANT/827/E26/LED	Clear Filament	Yes	120	2700K	82	350	15,000	40
A19											
4.5 Watt	E26	81128	A19CL4ANT/827/LED	Clear Filament	Yes	120	2700K	82	450	15,000	40
4.5 Watt	E26	81129	A19AMB4ANT/722/LED	Amber Filament	Yes	120	2200K	75	380	15,000	40
S14											
2 Watt	E26	81139	S14CL2ANT/827/LED	Clear Filament	No	120	2700K	82	200	15,000	25
2 Watt	E26	81140	S14AMB2ANT/822/LED	Amber Filament	No	120	2200K	82	160	15,000	25
2 Watt	E26	82139	S14CL2ANT/827/LED2	Clear Filament	Yes	120	2700K	82	200	15,000	25
PAR36											
4.5 Watt	MP Term	81074	PAR36WFL4/827/IP67/LED		Yes	10-15	2700K	82	300	40,000	20
6.5 Watt	MP Term	81075	PAR36WFL6/827/IP67/LED		Yes	10-15	2700K	82	450	40,000	35
12.5 Watt	MP Term	81076	PAR36WFL12/827/IP67/LED		Yes	10-15	2700K	82	800	40,000	50

♦ May not be compatible with all dimming systems. Use on incompatible systems may shorten lamp life. Lamps should be tested in the application for compatibility prior to full installations on circuits using such devices.
 ♦ Acceptable for use in sealed metal landscape fixtures when protected from the elements.
 • New Product

sollos®

LANDSCAPE LIGHTING
A Halco Lighting Technologies Company



Halco Lighting Technologies
2940 Pacific Drive Norcross GA 30071
P.O. Box 1368 Norcross GA 30091-1368
Toll Free 800-677-3334 | Fax 800-880-0822
halcolighting.com